




**Product Features**

- Long life and better thermal management.
- High efficacy LED.
- Uniform and optimum light output and energy savings.
- Higher PF, Lower THD and Surge Protection.
- Mounting height up to 3-meter max
- Detection range 8-meter Diameter.



|                                 |                                    |                                 |
|---------------------------------|------------------------------------|---------------------------------|
| <b>Electrical Specification</b> | Rated Voltage (V)                  | 220-240Vac                      |
|                                 | Operating Voltage Range (V)        | 160-300Vac                      |
|                                 | Operating Frequency (Hz)           | 50 +/-3%                        |
|                                 | Power Factor                       | > 0.95                          |
|                                 | Driver Efficiency (%)              | > 83                            |
|                                 | System Power Consumption (W)± 10%  | 20W                             |
|                                 | Inbuilt Surge Protection (kV)      | 4KV                             |
|                                 | Electrical Insulation Class        | Suitable for Class II           |
| <b>Optical Specification</b>    | Typ. Fixture Efficacy (LM/W)       | 100                             |
|                                 | Color Temperature (K)              | CDL / NDL / WDL                 |
|                                 | CRI                                | 80                              |
|                                 | Beam Angle options                 | Diffused                        |
| <b>Other Specification</b>      | Operating Ambient Temperature (°C) | 0°C to + 40°C                   |
|                                 | Housing                            | ABS                             |
|                                 | Mounting Arrangement               | Wall mount Type                 |
|                                 | IP rating                          | IP20                            |
| <b>Motion Sensor</b>            | Operating Frequency                | 5.8 GHz ±74.9MHz. ISM wave band |
|                                 | Hold time                          | 30S                             |
|                                 | Stand by dim level                 | ON-OFF / Dimming with 10% level |
|                                 | Detection area                     | 6-meter dia.                    |

**Model No.**

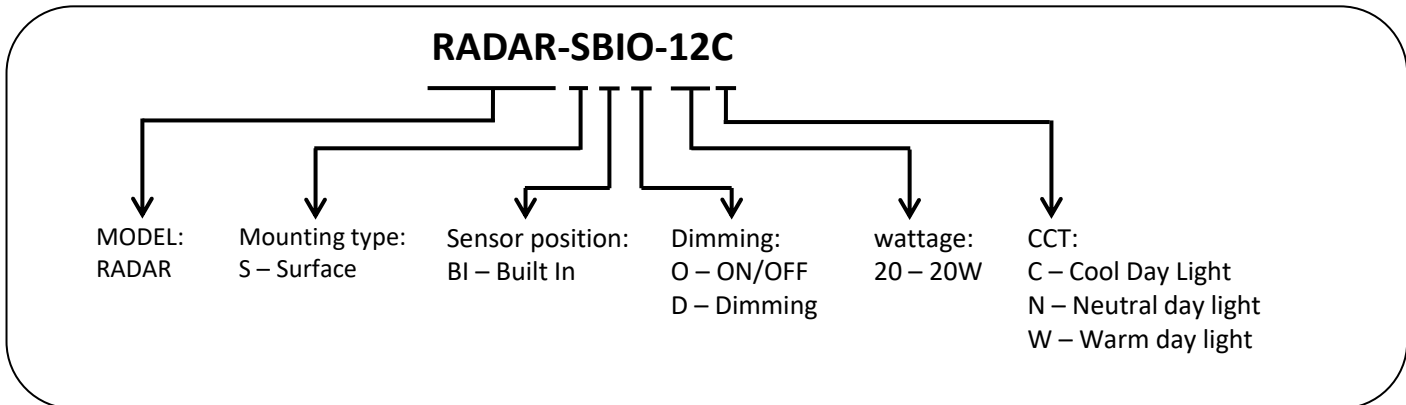

All features, functionality and other product specifications are subject to change without notice or obligation.

Model No.

