

Product Features




- Long life and better thermal management.
- High efficacy LED.
- Uniform and optimum light output and energy savings.
- Higher PF, Lower THD and Surge Protection.
- IP65



| | | |
|---------------------------------|------------------------------------|---------------------------------|
| Electrical Specification | Rated Voltage (V) | 220-240Vac |
| | Operating Voltage Range (V) | 140-300Vac |
| | Operating Frequency (Hz) | 50 +/-3% |
| | Driver Efficiency (%) | > 78 |
| | System Power Consumption (W)± 10% | 15W |
| | Inbuilt Surge Protection (kV) | 2.5KV |
| | Electrical Insulation Class | Suitable for Class II |
| | Surge Protection (kV)(Inline SPD) | NA |
| Optical Specification | Light Source | LED |
| | Typ. Fixture Efficacy (LM/W) | Decorative light |
| | Color Temperature (K) | CDL / NDL / WDL |
| | CRI | 70 |
| | Diffuser / Optical material | Milky |
| | Beam Angle options | Diffused |
| Other Specification | Operating Ambient Temperature (°C) | 0°C to + 45°C |
| | Housing | Powder coated aluminum die cast |
| | Mounting Arrangement | Wall mounted |
| | IP rating | IP65 |

Model No.

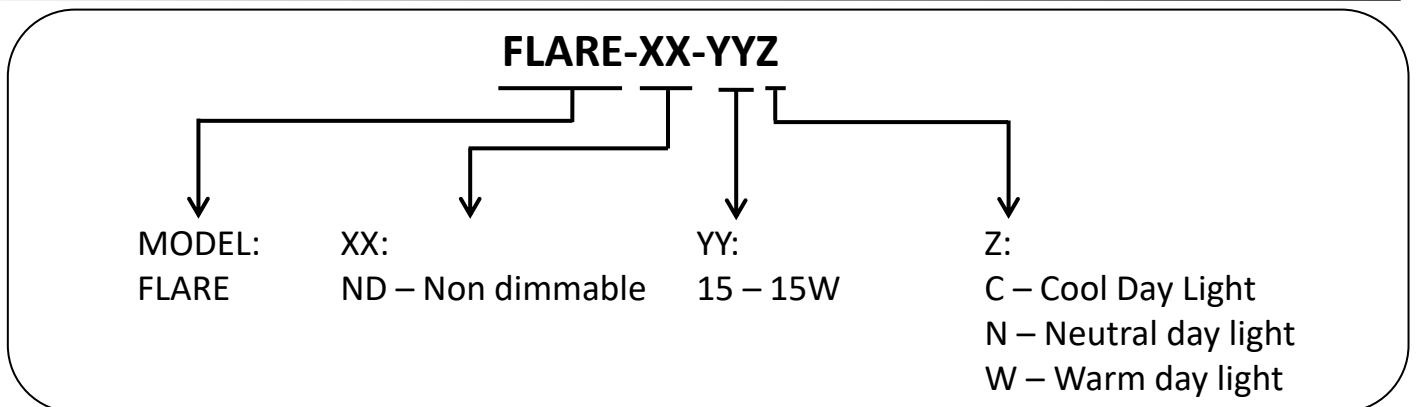

All features, functionality and other product specifications are subject to change without notice or obligation.